


# LAMIWOOD STANDARD

Product Code: LWB  
 Origin: Malaysia  
 Manufacturer: Lien Huat Alliance Sdn. Bhd.

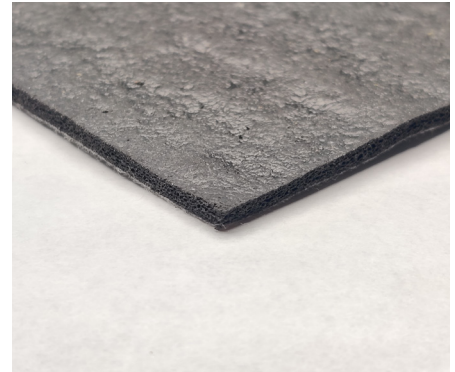

## PRODUCT SPECIFICATIONS

<b>Construction</b>	: Flat Sponge
<b>Raw Material</b>	: 100% Natural Rubber
<b>Width</b>	: 1.37 m (4.49')
<b>Length</b>	: 11.00 m (36' 1.1")
<b>Roll Size</b>	: 15.07 m <sup>2</sup> (18.02 yd <sup>2</sup> )
<b>Weight</b>	: 2123 g/m <sup>2</sup> (88.07 oz/yd <sup>2</sup> )
<b>Density</b>	: 708 kg/m <sup>3</sup> (26.63 lbs/ft <sup>3</sup> )
<b>Nominal Thickness</b>	: 3.0 mm +/- 0.5 mm (0.276" +/- 0.02")
<b>Colour</b>	: Black
<b>Backing Materials</b>	: Polyester Spunbonded Fabric

## PRODUCT DESCRIPTION

Lamiwood is a dense rubber underlayment suitable for laminates and Timber Flooring. It provides excellent acoustical dampening performance that reduces impact sound transmission through your floors. It also prevents your top surface from having direct contact with the concrete subfloor, absorbing the impact of foot traffic, and thereby increasing the lifespan of the top surface.

## RECOMMENDED APPLICATIONS

**Sectors:** Residential, Commercial, Hospitality

**Areas:** Service Apartments/Hotels, Offices, Homes, Showrooms, Retail Outlets, Restaurants, Beach Resorts

**Floor Covering:** Laminates, Timber Flooring, Engineered Flooring

**Installation Method:** Install with fabric-side facing up, floating system or glued-down

## SUMMARY OF TESTS

Sound Transmission Class (STC)	53 STC	ASTM E 413-04
Impact Insulation Class (IIC)	61 IIC	ASTM E 989-89
Impact Sound Reduction (Delta Lw)	22 dB	BS EN ISO 717-2
Hot Metal Nut Test (Pass/Fail)	Pass / Medium Radius	BS 4790

## Manufacturer Warranty (For the life of the top surface)

A manufacturer's certificate of quality and warranty is available on request.  
 Warranty will only take into effect AFTER completion and due inspection of the project.

\*This is important to ensure that you receive the authentic product and that no substitutes are used for your projects

### Disclaimer

1. Some test results were derived from similar product results  
 2. Densities are indicative values only as there may be slight variations within normal manufacturing tolerance due to the product being made from natural materials. However, such variations will not affect the quality and performance of the product.

Lot 9083, Jalan Udang Galah, Telok Gong,  
 42000 Port Klang, Selangor, Malaysia

T: +60 3 3134 3902 F: +60 3 3134 3903  
 E: info@lienrub.com www.lienhuat.com

